

We
provide
our
customer
a smart
and
colorful
life!

FLOORWORKS[®]
THE CREATIVE FLOOR COVERING






SC2361



SC2362

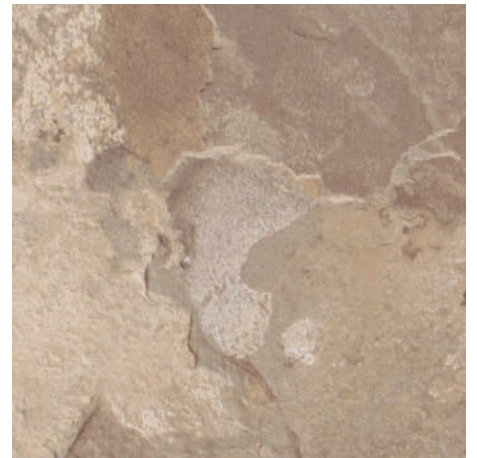

SC2363



SC2364



SC2365



SC2366



SC2367



SC2368



New

Herringbone

Dimension: 3"x18" Gauge: 2.0 mm



HB23181



HB23183



HB23182



HB23184

New

Chevron

Dimension: 4"x18" Gauge: 2.0 mm




CV24181



CV24183



CV24182

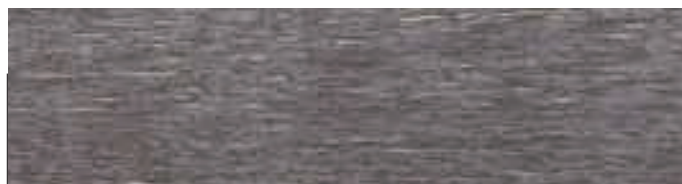

CV24184

New

Registered Emboss *Dimension: 9"x48" Gauge: 3.0 mm*



RG39481



RG39482




RG39484



RG39483




RG39485

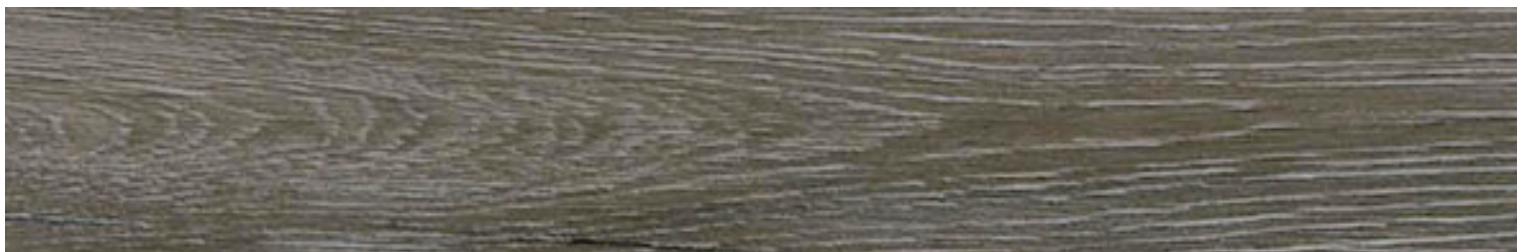


RG39486

Dimension: 9"x36" Gauge: 3.0 mm

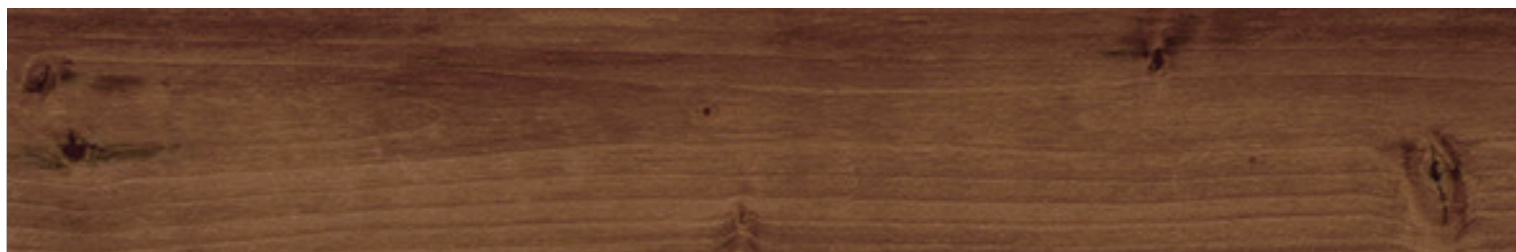


INE3665

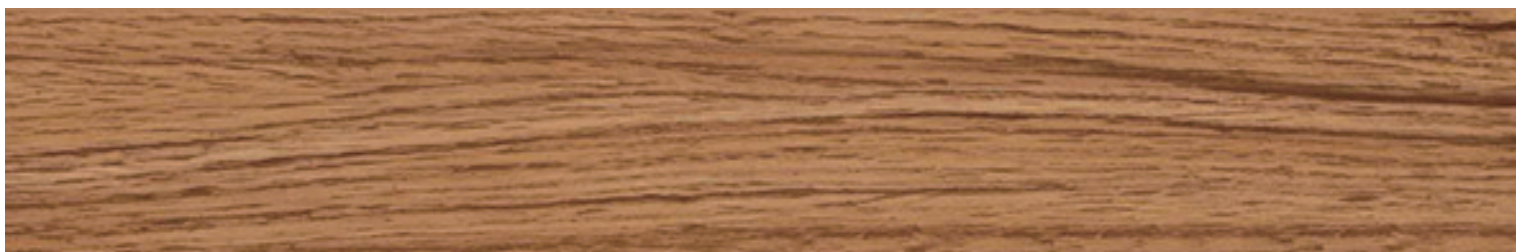


INE3667



INE3677

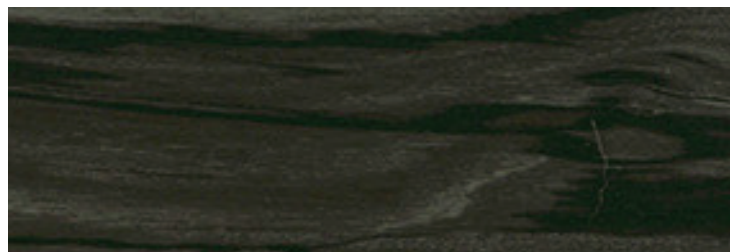

INE3679

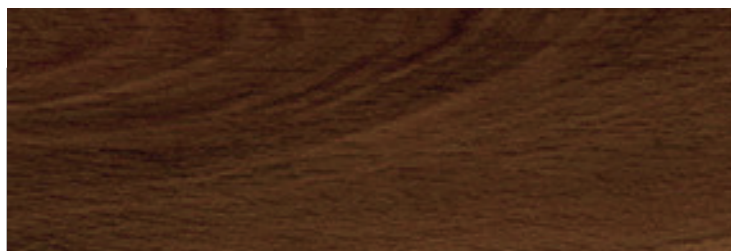

INE3678



INE3681




INE3675




Dimension: 7.2"x36" Gauge: 3.0 mm




INP3647

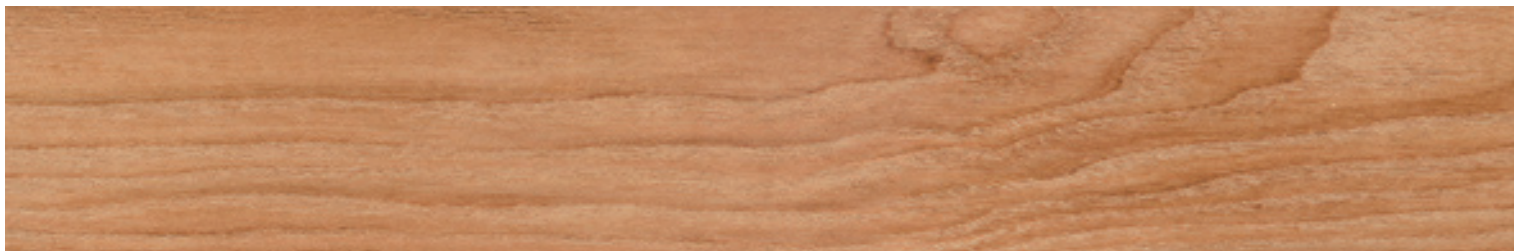

INP3648

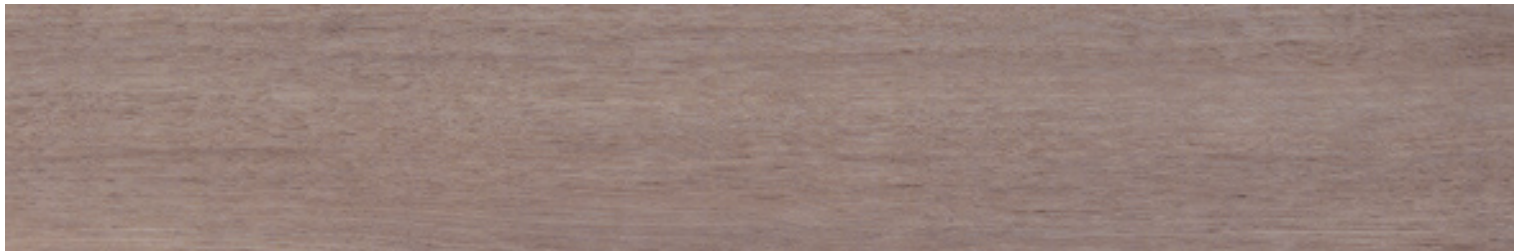

INP3649

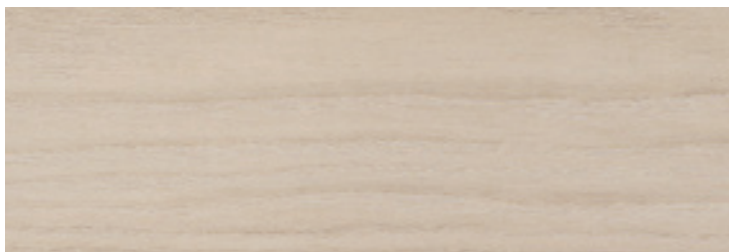


INP3650



INP3651




INP3652

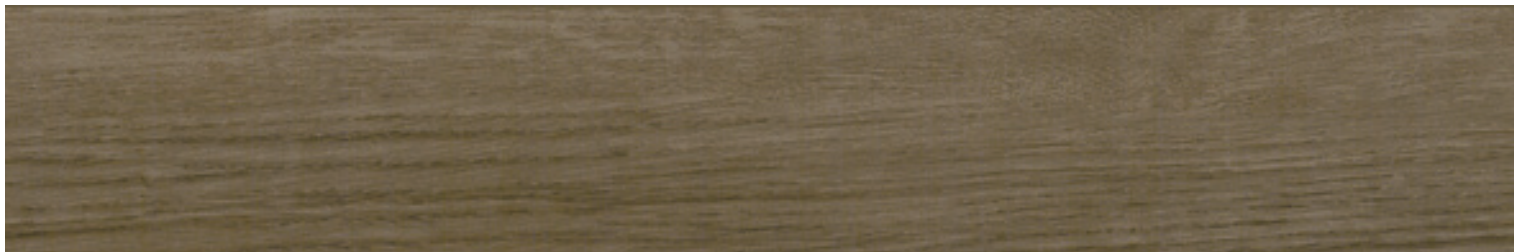


INP3653


Dimension: 7.2"x36" Gauge: 3.0 mm

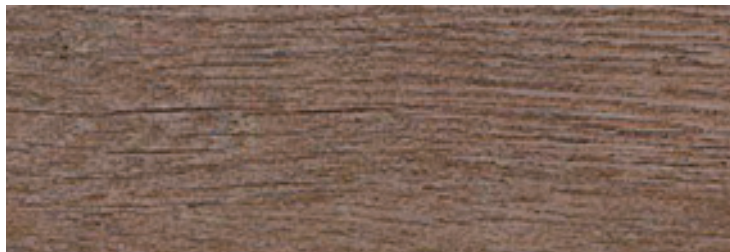

INP3611

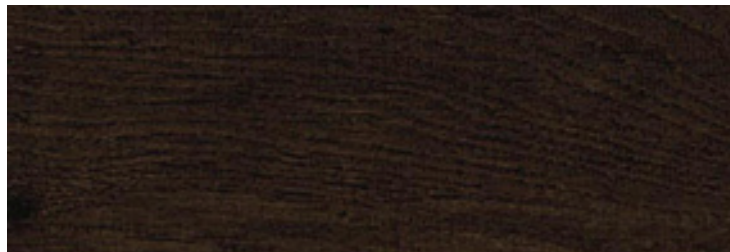

INP3618

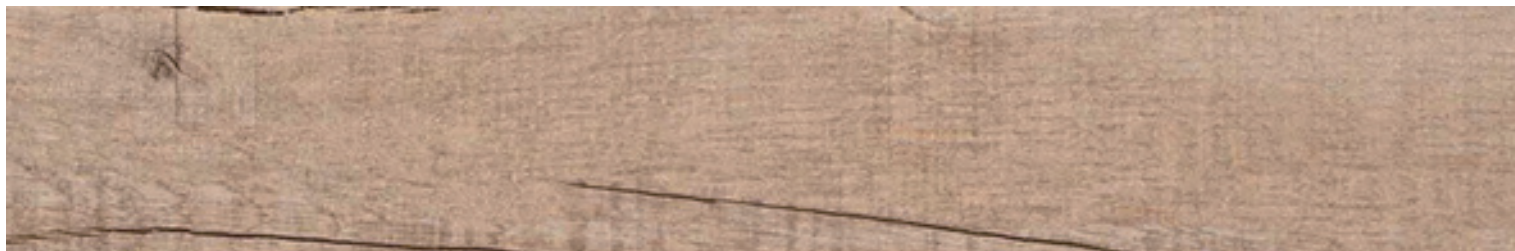


INP3641




INP3642



INP3643

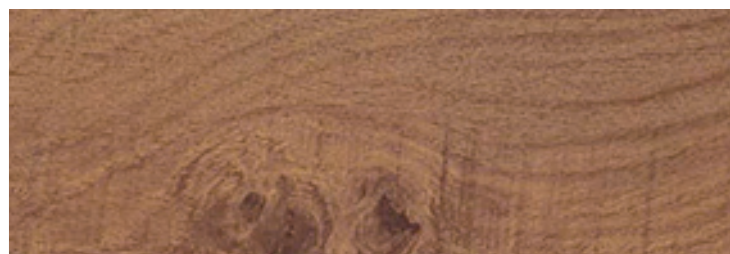

INP3644

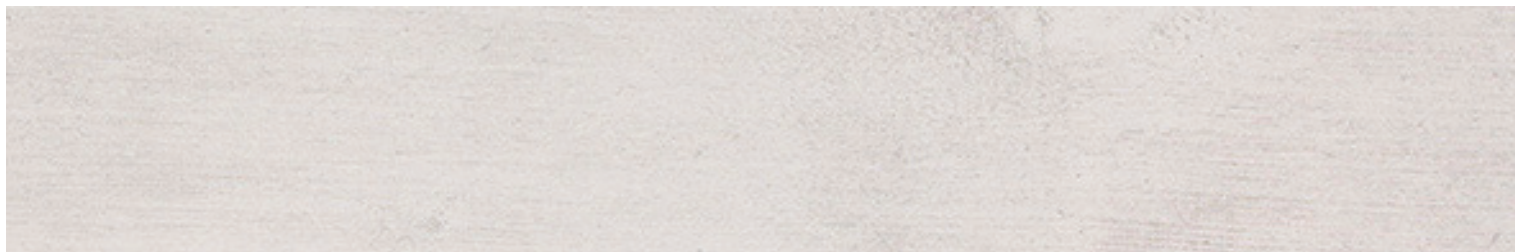

INP3645



INP3646


Dimension: 6"x36" Gauge: 1.5 mm



PTT771



PTT772

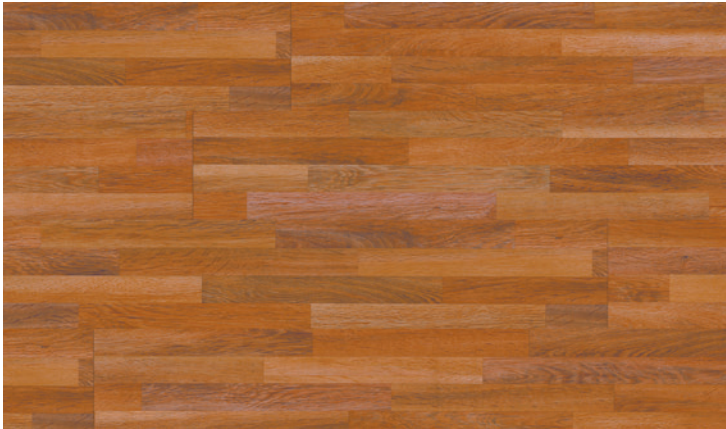

PTT773



PTT774



PTT649



PTT775



PTT650




PTT776




PTT777



Dimension: 6"x36" Gauge: 1.5 mm

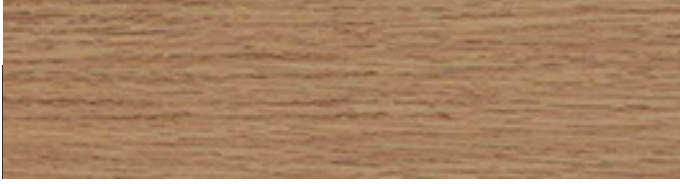


PTT402

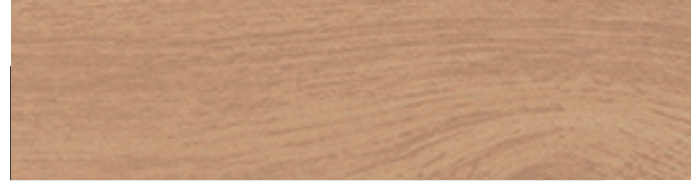

PTT642



PTT403

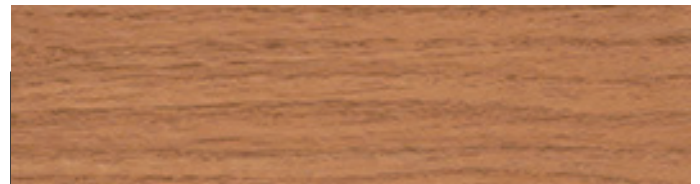

PTT644



PTT405



PTT645



PTT406



PTT646



PTT407



PTT647



PTT408




PTT651




PTT564



PTT652

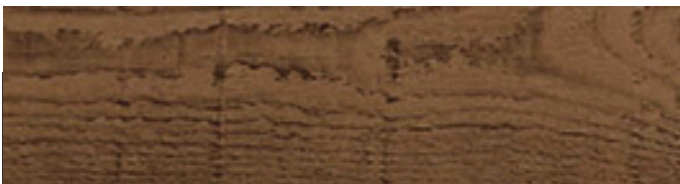


PTT565

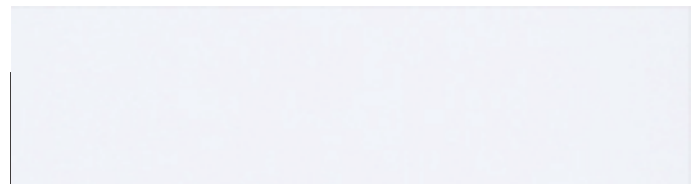

PTT653

Dimension: 18"x18" Gauge: 1.5 mm

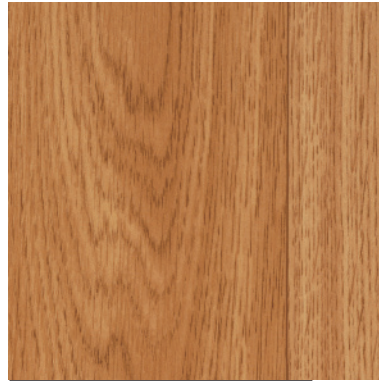

PT607



PT608



PT604



PT614




PT615



PT653




PT654

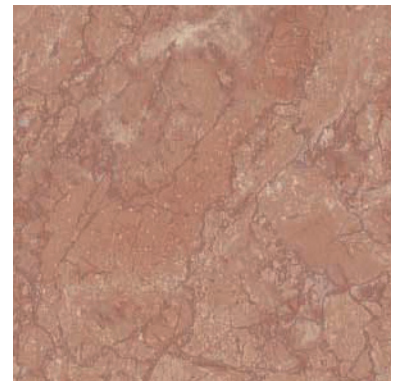

PT655



PT669

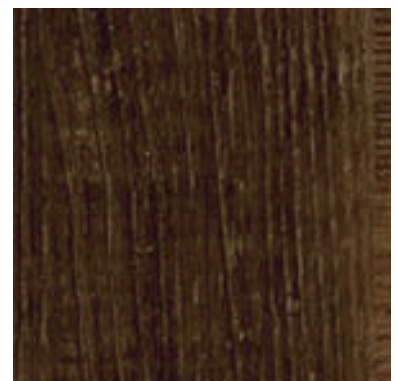

PT670

New


ZIP Premium Flooring

Dimension: 170mm x 1210mm Gauge: 5.0 mm

FLORWORKS[®]
THE CREATIVE FLOOR COVERING



S50

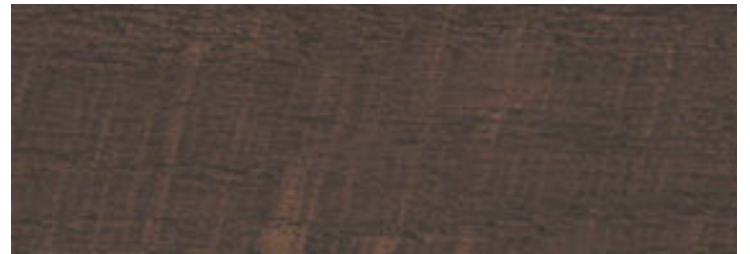

S58



S56



S59



S60

New

Hexagon Collection


Dimension: 18" Hexagon Point to point
Gauge: 2.0 mm



HXA01



HXA02




HXA03



HXA04



HXA05



HXA06



HXA07



HXA08

Metallic & Artistic Collection

Dimension: 18"x18" Gauge: 2.0 mm



ECT1810



ECT1811



ECT1812



ECT1813



ECT1814



ECT1815



ECT1807



ECT1808



ECT1809



Dimension: 6"x36" Gauge: 2.0 mm



ECP201



ECP208



ECP202



ECP209



ECP203



ECP215



ECP204



ECP216




ECP206



ECP217




ECP207

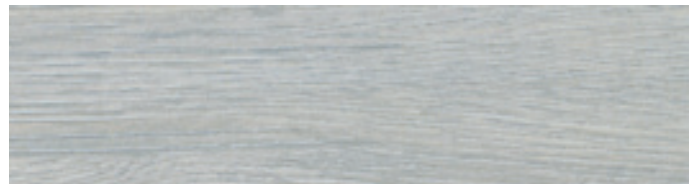


ECP218


Stone Collection Dimension: 18"x18" Gauge: 2.0 mm



ECT1803



ECT1804




ECT1805



ECT1806

Dimension: 7.2"x36" Gauge: 2.0 mm

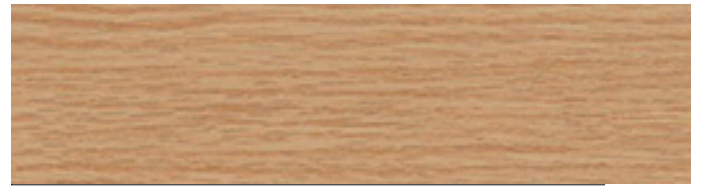

HDP2612



HDP2615



HDP2616



MET7213



HDP2626




MET7216



HDP2627



MET7220

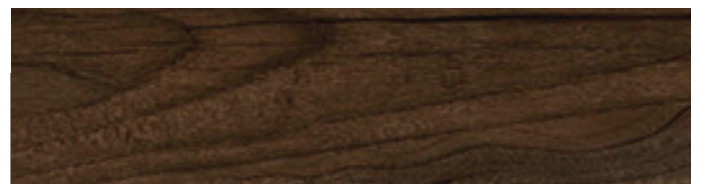


HDP2628



MET7221



HDP2629

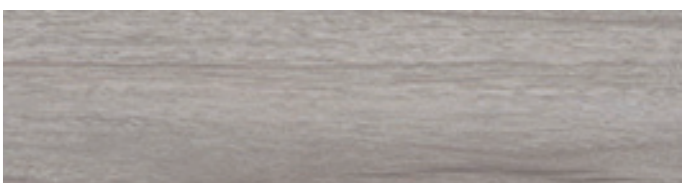

MET7222



HDP2630

Dimension: 9"x36" Gauge: 2.0 mm



HDE2602



HDE2610



HDE2620



HDE2622



HDE2621



HDE2623



HDE2624



HDE2625

The Creative Floor Covering to Meet Today's Design Needs.

Description

FLOORWORKS® TILES are extremely high resistance vinyl floor coverings designed to reproduce the natural beauty of real marble, granite, slate, and wood. It is manufactured to combine industrial-grade wear performance, care-free maintenance and a surprisingly low installation cost which makes it affordable for many construction projects.

FLOORWORKS® TILES are engineered for high profile public areas such as reception and entrance space, all types of shops, banks, supermarkets, restaurants, food areas, boutiques, hair salons and customer service areas. They are equally suitable for residential floors of domestic homes.

The elegance and Beauty of FLOORWORKS® TILES are unsurpassed. All tiles are asbestos free, produced from recycled materials, and are environmentally safe and friendly. The random nature of wood and other natural materials from which our designs are taken, means that variation in color and shade is normal and enhances the natural look of our products.

Construction

FLOORWORKS® TILES uses a high-tech 100% PVC patterned photographic print film layer encapsulated between a heavy duty clear PVC wear layer and vinyl backing.

Installation

Sub-floor must be clean, dry, smooth, and level. It needs to be free from dust, grease, oil and other impurities. Material should be placed at room temperature 24 hours prior to installation.

Maintenance

All quality floorcoverings require routine attention to help keep their beauty and attractiveness. FLOORWORKS® TILES offers great wear resistance with easy maintenance. Our material is permanently anti-static to greases, oil and dilute acids. Our embossed clear wear layer is formulated to protect the designs, disguise scuffs and scratches and provide long life with minimum maintenance.

Specifications

Wear Layer : 0.1~0.5 mm
Overall Thickness : 1.5~5.0 mm

Now with UV protection



Wear resistant



Slip resistant




Performance 3
PU coating



Chemical
resistant



Flame resistant



Certificate : TW98/12524



Certificate : TW09/00305